



S 27th St & W Loomis Rd, Milwaukee, WI 53221

Southpoint



WILSON CREEK

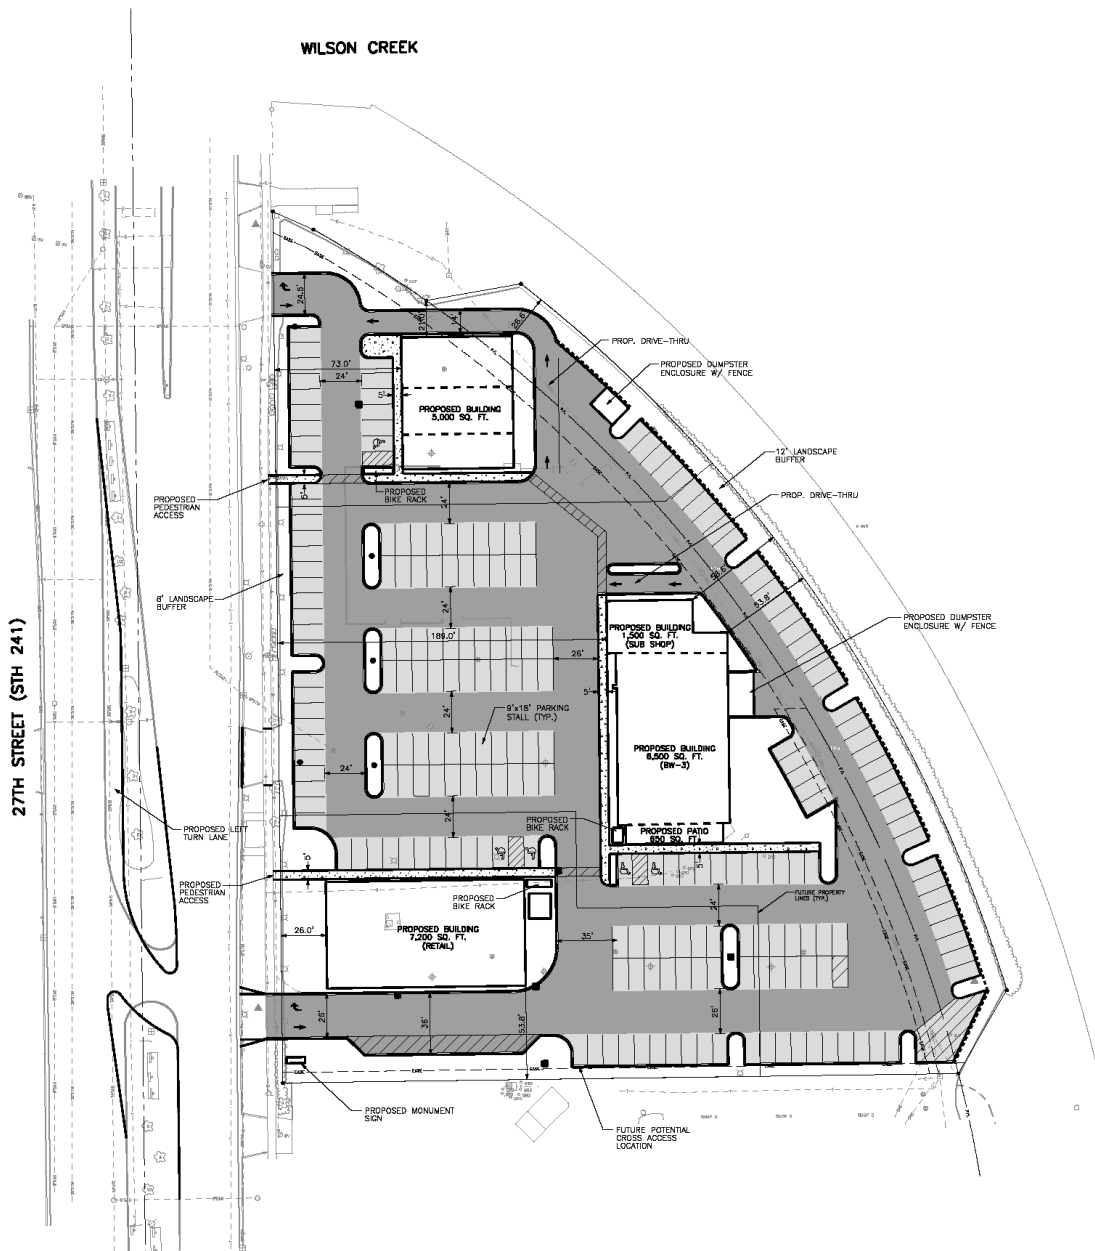

LEGEND

- 1. ASPHALT PAVEMENT
- 2. HEAVY DUTY ASPHALT PAVEMENT
- 3. CONCRETE SIDEWALK PAVEMENT
- 4. CONCRETE PAVEMENT
- 5. CONCRETE CURB AND GUTTER
- 6. THICKENED EDGE WALK
- 7. HANDICAP RAMP PER ADA STANDARDS WITH TRUNCATED DOWNS

GENERAL NOTES

1. UNDERGROUND STRUCTURES AND UTILITIES HAVE BEEN SHOWN TO A REASONABLE DEGREE OF ACCURACY BASED ON FIELD SURVEY. IT SHALL BE CONTRACTOR'S RESPONSIBILITY TO VERIFY THE EXACT LOCATION AND DEPTH OF EXISTING UTILITIES AND TO AVOID DAMAGE THEREOF.
2. PROPOSED SIDEWALK RAMP SHALL CONFORM TO CITY OF MILWAUKEE STANDARDS.
3. ALL DIMENSIONS ARE TO THE EDGE OF PAVEMENT, THICKENED EDGE OR FACE OF CURB.
4. SIDEWALK ADJACENT TO PARKING LOTS, DRIVE AISLES AND ACCESS DRIVEWAY SHALL BE CONSTRUCTED WITH A THICKENED EDGE. SEE DETAIL 4/C400.
5. ELECTRONIC COPIES OF THE FILES ARE AVAILABLE UPON REQUEST FOR LAYOUT.

PROPOSED PARKING

AVAILABLE HANDICAP PARKING = 5
 AVAILABLE STANDARD PARKING = 217
 TOTAL PARKING = 222

IMPERVIOUS CALCULATIONS

TOTAL SITE AREA = 3.38 ACRES
 EXISTING PERVIOUS AREA = 0.00 ACRES (0%)
 PROPOSED PERVIOUS AREA = 0.40 ACRES (11%)


LANDSCAPE LEGEND

- CONTRACTOR SPEC
10" 1/2" 1/4" 1/8" 1/16" 1/32" 1/64" 1/128" 1/256" 1/512" 1/1024" 1/2048" 1/4096" 1/8192" 1/16384" 1/32768" 1/65536" 1/131072" 1/262144" 1/524288" 1/1048576" 1/2097152" 1/4194304" 1/8388608" 1/16777216" 1/33554432" 1/67108864" 1/134217728" 1/268435456" 1/536870912" 1/1073741824" 1/2147483648" 1/4294967296" 1/8589934592" 1/17179869184" 1/34359738368" 1/68719476736" 1/137438953472" 1/274877906944" 1/549755813888" 1/1099511627776" 1/2199023255552" 1/4398046511104" 1/8796093022208" 1/17592186044416" 1/35184372088832" 1/70368744177664" 1/140737488355328" 1/281474976710656" 1/562949953421312" 1/1125899906842624" 1/2251799813685248" 1/4503599627370496" 1/9007199254740992" 1/18014398509481984" 1/36028797018963968" 1/72057594037927936" 1/144115188075855872" 1/288230376151711744" 1/576460752303423488" 1/1152921504606846976" 1/2305843009213693952" 1/4611686018427387904" 1/9223372036854775808" 1/18446744073709551616" 1/36893488147419103232" 1/73786976294838206464" 1/147573952589676412928" 1/295147905179352825856" 1/590295810358705651712" 1/1180591620717411303424" 1/2361183241434822606848" 1/4722366482869645213696" 1/9444732965739290427392" 1/18889465931478580854784" 1/37778931862957161709568" 1/75557863725914323419136" 1/151115727451828646838272" 1/302231454903657293676544" 1/604462909807314587353088" 1/1208925819614629174706176" 1/2417851639229258349412352" 1/4835703278458516698824704" 1/9671406556917033397649408" 1/19342813113834066795298816" 1/38685626227668133590597632" 1/77371252455336267181195264" 1/154742504910672534362390528" 1/309485009821345068724781056" 1/618970019642690137449562112" 1/1237940039285380274899124224" 1/2475880078570760549798248448" 1/4951760157141521099596496896" 1/9903520314283042199192993792" 1/19807040628566084398385987584" 1/39614081257132168796771975168" 1/79228162514264337593543950336" 1/158456325028528675187087900672" 1/316912650057057350374175801344" 1/633825300114114700748351602688" 1/1267650600228229401496703205376" 1/2535301200456458802993406410752" 1/5070602400912917605986812821504" 1/10141204801825835211973625643008" 1/20282409603651670423947251286016" 1/40564819207303340847894502572032" 1/81129638414606681695789005144064" 1/162259276829213363391578010288128" 1/324518553658426726783156020576256" 1/649037107316853453566312041152512" 1/1298074214633706907132624082305024" 1/2596148429267413814265248164610048" 1/5192296858534827628530496329220096" 1/10384593717069655257060992658440192" 1/20769187434139310514121985316880384" 1/41538374868278621028243970633760768" 1/83076749736557242056487941267521536" 1/166153499473114484112975882535043072" 1/332306998946228968225951765070086144" 1/664613997892457936451903530140172288" 1/1329227995784915872903807060280344576" 1/2658455991569831745807614120560689152" 1/5316911983139663491615228241121378304" 1/10633823966279326983230456482242756608" 1/21267647932558653966460912964485513216" 1/42535295865117307932921825928971026432" 1/85070591730234615865843651857942052864" 1/170141183460469231731687303715884105728" 1/340282366920938463463374607431768211456" 1/680564733841876926926749214863536422912" 1/1361129467683753853853498429727072845824" 1/2722258935367507707706996859454145691648" 1/5444517870735015415413993718908291383296" 1/10889035741470030830827987437816582766592" 1/21778071482940061661655974875633165533184" 1/43556142965880123323311949751266331066368" 1/87112285931760246646623899502532662132736" 1/17422457186352049329324779900506524426552" 1/34844914372704098658649559801013048853104" 1/69689828745408197317299119602026097706208" 1/139379657490816394634598239204052195412416" 1/278759314981632789269196478408104390824832" 1/557518629963265578538392956816208781649664" 1/1115037259926531157076785913632417363299328" 1/2230074519853062314153571827264834726598656" 1/4460149039706124628307143654529669453197312" 1/8920298079412249256614287309059338906394624" 1/17840596158824498513228574618118677812789248" 1/35681192317648997026457149236237355625578496" 1/71362384635297994052914298472474711251156992" 1/142724769270595988105828596944949422502313984" 1/285449538541191976211657193889898845004627968" 1/570899077082383952423314387779797690009255936" 1/1141798154164767904846628775559595380018511872" 1/2283596308329535809693257551119190760037023744" 1/4567192616659071619386515102238381520074047488" 1/9134385233318143238773030204476763040148094976" 1/18268770466636286477546060408953526080296189952" 1/36537540933272572955092120817907052160592379904" 1/73075081866545145910184241635814104321184759808" 1/146150163733090291820368483271628208642369519616" 1/292300327466180583640736966543256417284739039232" 1/584600654932361167281473933086512834569478078464" 1/1169201309864722334562947866173025669138956156928" 1/2338402619729444669125895732346051338277912313856" 1/4676805239458889338251791464692102676555824627712" 1/9353610478917778676503582929384205353111649255424" 1/18707220957835557353007165858768410706223298510848" 1/37414441915671114706014331717536821412446597021696" 1/74828883831342229412028663435073642824893194043392" 1/149657767662684458824057326870147285649786388086784" 1/299315535325368917648114653740294571299572776173568" 1/598631070650737835296229307480589142599145552347136" 1/1197262141301475670592458614961178285198291104694272" 1/2394524282602951341184917229922356570396582209388544" 1/4789048565205902682369834459844713140793164418777088" 1/9578097130411805364739668919689426281586328837554176" 1/19156194260823610729479337839378852563172657675108352" 1/38312388521647221458958675678757705126345315350216704" 1/76624777043294442917917351357515410252690630700433408" 1/153249554086588885835834702715030820505381261400866816" 1/306499108173177771671669405430061641010762522801733728" 1/612998216346355543343338810860123282021525045603467456" 1/1225996432692711086686677621720246564043050091206934912" 1/2451992865385422173373355243440493128086100182413869824" 1/4903985730770844346746710486880986256172200364827739648" 1/9807971461541688693493420973761972512344400729655479296" 1/1961594292288337738698684194752394502468880145931895872" 1/3923188584576675477397368389504789004937760291863791744" 1/7846377169153350954794736779009578009875520583727583488" 1/15692754338306701909589473558019156019751041167455166976" 1/31385508676613403819178947116038312039502082334910333952" 1/62771017353226807638357894232076624079004164669820667904" 1/125542034706453615276715788464153248158008329339641335808" 1/251084069412907230553431576928306496316016658679282671616" 1/502168138825814461106863153856612992632033317358565343232" 1/1004336277651628922213726307713225953264066634717130686464" 1/2008672555303257844427452615426451906528133269434261372928" 1/4017345110606515688854905230852903813056266538868522745856" 1/8034690221213031377709810461705807626112533077737045491712" 1/16069380442426062755419620923411615252225066155474090983424" 1/32138760884852125510839241846823230504450132310948181966848" 1/64277521769704251021678483693646461008900264621896363933696" 1/128555043539408502043356967387292922017800529243792727867392" 1/257110087078817004086713934774585844035601058487585455734784" 1/514220174157634008173427869549171688071202116975170911469568" 1/1028440348315268016346855739098343376142404233950341822939136" 1/2056880696630536032693711478196686752284808467900683645878272" 1/4113761393261072065387422956393373504569616935801367291756544" 1/8227522786522144130774845912786747009139233871602734583513088" 1/16455045573044288261549691825573494018278467743205469167026176" 1/32910091146088576523099383651146988036556935486410938334052352" 1/65820182292177153046198767302293976073113870972821876668104704" 1/131640364584354306092397534604587952146227741945643753336209408" 1/263280729168708612184795069209175904292455483891287506672418816" 1/526561458337417224369590138418351808584910967782575013344837632" 1/1053122916674834448739180276836703617169821935565150026689675264" 1/2106245833349668897478360553673407234339643871130300053379350528" 1/4212491666699337794956721107346814468679287742260600106758701056" 1/8424983333398675589913442214693628937358575484521200213517402112" 1/16849966666797351179826884429387257874717150969042400427034804224" 1/33699933333594702359653768858774515749434301938084800854069608448" 1/67399866667189404719307537717549031498868603876169601708139216896" 1/134799733334378809438615075435098062997737207752339203416278433792" 1/269599466668757618877230150870196125995474415504678406832556867584" 1/539198933337515237754460301740392251990948831009356813665113735168" 1/1078397866675030475508920603480784503981897662018713627330227470336" 1/2156795733350060951017841206961569007963795324037427254660454840672" 1/4313591466700121902035682413923138015927590648074854509320909681344" 1/8627182933400243804071364827846276031855181296149709018641819362688" 1/17254365866800487608142729655692552063710362592299418037283638725376" 1/34508731733600975216285459311385104127420725184598836074567277450752" 1/69017463467201950432570918622770208254841450369197672149134554901504" 1/138034926934403900865141837245540416509682900738395344298269109803008" 1/276069853868807801730283674491080833019365801476790688596538219606016" 1/552139707737615603460567348982161666038731602953581377193076439212032" 1/1104279415475231206921134697964323332077463205907162754386152878424064" 1/2208558830950462413842269395928646664154926411814325508772305756848128" 1/4417117661900924827684538791857293328309852823628651017544611513696256" 1/8834235323801849655369077583714586656619705647257302035089223027392512" 1/17668470647603699310738155167429173313239411294514604070178446054785024" 1/35336941295207398621476310334858346626478822589029208140356892109570048" 1/70673882590414797242952620669716693252957645178058416280713784219140096" 1/141347765180829594485905241339433386505915290356116832561427568438280192" 1/282695530361659188971810482678866773011830580712233665122855136876560384" 1/565391060723318377943620965357733546023661161424467330245710273753120768" 1/1130782121446636755887241930715467092047322322848934660491420547506241536" 1/2261564242893273511774483861430934184094644645697869320982841095012483072" 1/4523128485786547023548967722861868368189289291395738641965682190024966144" 1/9046256971573094047097935445723736736378578582791477283931364380049932288" 1/18092513943146188094195870891447473472757157165582954567862728760099864576" 1/36185027886292376188391741782894946945514314331165909135725457520199729152" 1/72370055772584752376783483565789893891028628662331818271450915040399458304" 1/144740111545169504753566967131579787782057257324663636542901830080798916608" 1/289480223090339009507133934263159575564114514649327273085803660161597833216" 1/578960446180678019014267868526319151128229029298654546171607320323195666432" 1/1157920892361356038028535737052638302256458058597309092343214640646391332864" 1/2315841784722712076057071474105276604512916117194618184686429281292782665728" 1/4631683569445424152114142948210553209025832234389236369372858562585565331456" 1/9263367138890848304228285896421106418051664468778472738745717125171130662912" 1/18526734277781696608456571792842212836103328937556945477491434250342261325824" 1/37053468555563393216913143585684425672206657875113890954982868500684522651648" 1/74106937111126786433826287171368851344413315750227781909965737001369045303296" 1/148213874222253572867652574342737702688826631500455563819931474002738090606592" 1/296427748444507145735305148685475405377653263000911127639862948005476181213184" 1/592855496889014291470610297370950810755306526001822255279725896010952362426368" 1/1185710993778028582941220594741901621510613052003644510559451792021904724852736" 1/2371421987556057165882441189483803243021226104007289021118903584043809449705472" 1/4742843975112114331764882378967606486042452208014578042237807168087618899410944" 1/9485687950224228663529764757935212972084904416029156084475614336175237798821888" 1/18971375900448457327059529515870425944169808832058312168951226732350475597643776" 1/37942751800896914654119059031740851888339617664116624337902453464700951195287552" 1/75885503601793829308238118063481703776







NORTH ELEVATION

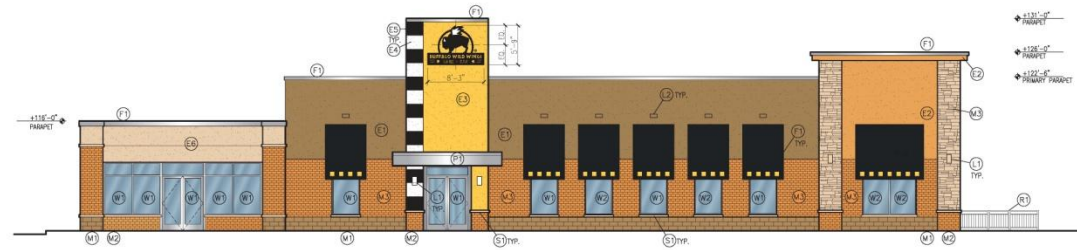

WEST ELEVATION

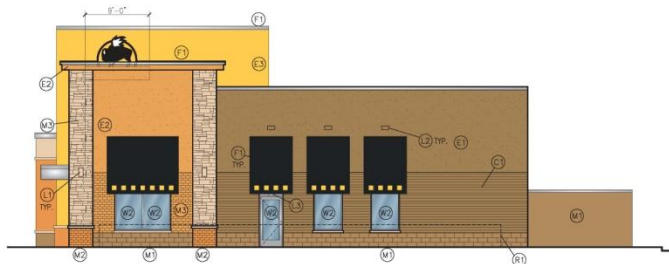

SOUTH ELEVATION

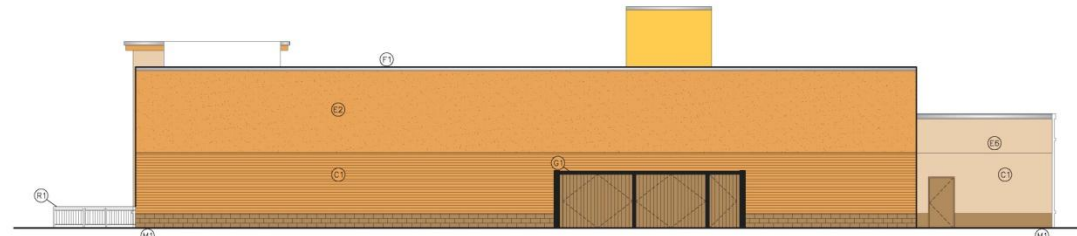

EAST ELEVATION

EXTERIOR MATERIALS KEY

KEY	MATERIAL	MANUF./TYPE/COLOR		
M1	CMU	COUNTY MATERIALS - HERITAGE/SABLE - SMOOTH FACE	M1	STOREFRONT SYSTEM
M2	MODULAR BRICK	CLOUD CERAMICS - TERRA COSTA YELLOW	M2	STOREFRONT SYSTEM
M3	CONCRETE VENEER STONE	QUARRY RIDGE STONE - WEATHERED EDGE BAY HARBOR	F1	FLASHING/TASCA
S1	STONE SILL	LEISTONE - BUFF	F2	FLASHING/TASCA
E1	EPS SYSTEM	#652 SMOLDERING EMBER	F3	FLASHING/TASCA
E2	EPS SYSTEM	#401 PRETZEL	L1	LIGHT
E3	EPS SYSTEM	#6888 SOCIAL BUTTERFLY	L2	LIGHT
E4	EPS SYSTEM	#652 310 CHINA WHITE	L3	LIGHT
E5	EPS SYSTEM	#K367 BLACK	R1	RAILING
E6	EPS SYSTEM	#100 - BEIGE	G1	GATE
P1	COMPOSITE METAL PANEL	TO MATCH UNA-CLAD SILVER METALLIC FACIA	C1	CEMENT BOARD SIDING
F1	FABRIC AWNING	SUNERELLA - JET BLACK 4806/8808 WITH PANTONE #116 COATED YELLOW SQUARES		

PRELIMINARY BUILDING ELEVATIONS

WILSON CREEK CROSSING • BUFFALO WILD WINGS

FEBRUARY 18, 2011 • ASK-008



NORTH (DRIVE-THRU SIDE) ELEVATION

1/8" = 1'-0"

2



WEST (FRONT) ELEVATION

1/8" = 1'-0"

1



EAST (REAR) ELEVATION
1/8" = 1'-0"

2




SOUTH (SIDE) ELEVATION
1/8" = 1'-0"

1

6" EXTENDED POLE MOUNT

16" (406 mm) PARKING/ROADWAY LIGHT

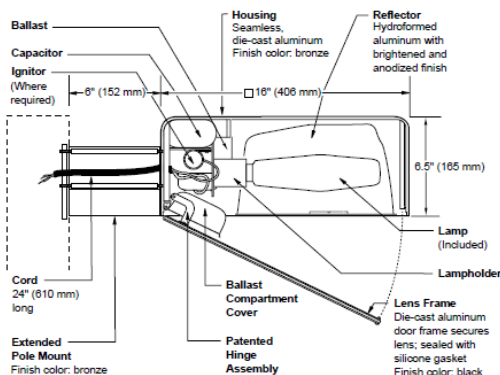

SPEC #	WATTAGE	CATALOG #
PULSE START METAL HALIDE		
	200W PSMH	PR2620-(a)(b)
	250W PSMH	PR2625-(a)(b)
	320W PSMH	PR2632-(a)(b)
	350W PSMH	PR2635-(a)(b)
	400W PSMH	PR2640-(a)(b)
METAL HALIDE		
	175W MH	PR2417-(a)(b)
	250W MH	PR2425-(a)(b)
	400W MH	PR2440-(a)(b)
HIGH PRESSURE SODIUM		
	250W HPS	PR2525-(a)(b)
	400W HPS	PR2540-(a)(b)

Specify (a) Voltage & (b) Options.

(a) VOLTAGE SUFFIX KEY	
M	120/208/240/277V (Standard)
T	120/277/347V (Canada Only) (Standard)
1	120V
2	277V
27	277V Reactor (PSMH Only)
3	208V
4	240V
5	480V
6	347V (Canada Only)

For voltage availability outside the US and Canada, see Bulletin TD-9 or contact your Ruud Lighting authorized International Distributor.

(b) OPTIONS
-(a)F Fusing
-(a)P Button I
-5P External
Q Quartz (includes (N/A on 1

Specify (a) Single V

GENERAL DESCRIPTION

Parking lot and roadway luminaire for HID lamp, totally enclosed. Supplied with IES Type III (250W MH is field adjustable to Type II) optical system. Housing is seamless, die-cast aluminum. Mounting consists of a 1.8" (44 mm) wide by 4.5" (114 mm) high by 6" (152 mm) long extruded aluminum arm. The arm is held in place with two 3/8" (9 mm) mounting rods fastened to a steel backing plate inside the pole, and by two nuts inside the fixture housing. Mounting rods are provided with sealing washers to prevent water leakage. Lens assembly consists of rigid aluminum frame and high-impact, clear-tempered glass.

ELECTRICAL

Fixture includes clear, mogul-base lamp. Pulse-rated porcelain enclosed, 4kv-rated screw-shell-type lampholder with spring-loaded center contact. Lamp ignitor included where required. All ballast assemblies are high-power factor and use the following circuit type:

Reactor (277V PSMH)
200 - 400W PSMH

CWA — Constant Wattage Autotransformer
200 - 400W PSMH; 175 - 400W MH;
250 - 400W HPS

LABELS

ANSI lamp wattage label supplied, visible during relamping. UL Listed in US and Canada for wet locations and enclosure classified IP65 per IEC 529 and IEC 598.


Exclusive Delta epoxy primer powder topcoat to corrosion, abrasion. The year limited warranty.

US 4,689,729

FWG-16 Wire
SBL-16 Back

PREMIUM STEEL

CROWN-WELD® POLES

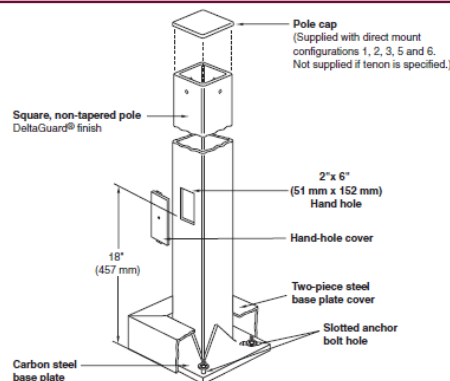

SPEC #	CATALOG #	POLE SIZE
Square Steel Poles		
		H (ft) x W (in) x Wall (in) H (m) x W (mm) x Wall (mm)
SPEC #	PS3S10C(a)BZ	10 x 3 x 0.125 3.0 x 76 x 3
SPEC #	PS3S15C(a)BZ	15 x 3 x 0.125 4.6 x 76 x 3
SPEC #	PS3S20C(a)BZ	20 x 3 x 0.125 6.1 x 76 x 3
SPEC #	PS4S10C(a)BZ	10 x 4 x 0.125 3.0 x 102 x 3
SPEC #	PS4S12C(a)BZ	12 x 4 x 0.125 3.7 x 102 x 3
SPEC #	PS4S15C(a)BZ	15 x 4 x 0.125 4.6 x 102 x 3
SPEC #	PS4S17C(a)BZ	17 x 4 x 0.125 5.2 x 102 x 3
SPEC #	PS4S20C(a)BZ	20 x 4 x 0.125 6.1 x 102 x 3
SPEC #	PS4S22C(a)BZ	22 x 4 x 0.125 6.7 x 102 x 3
SPEC #	PS4S22S(a)BZ	22 x 4 x 0.188 6.7 x 102 x 5
SPEC #	PS4S25C(a)BZ	25 x 4 x 0.125 7.6 x 102 x 3
<input checked="" type="checkbox"/> SPEC #	PS4S25S(a)BZ	25 x 4 x 0.188 7.6 x 102 x 5
SPEC #	PS4S27R(a)BZ	27 x 4 x 0.125 8.2 x 102 x 3
SPEC #	PS4S30R(a)BZ	30 x 4 x 0.125 9.1 x 102 x 3
SPEC #	PS4S30H(a)BZ	30 x 4 x 0.188 9.1 x 102 x 5
SPEC #	PS5S25S(a)BZ	25 x 5 x 0.188 7.6 x 127 x 5
SPEC #	PS5S30S(a)BZ	30 x 5 x 0.188 9.1 x 127 x 5
SPEC #	PS6S30S(a)BZ	30 x 6 x 0.188 9.1 x 152 x 5

Specify (a) pole configuration.

(a) POLE CONFIGURATION

1	Single (direct mount)	5	Triple (direct mount)
2	Twin @ 180° (direct mount)	6	Quad (direct mount)
3	Twin @ 90° (direct mount)	T	Tenon (order tenon separately)

For fixtures with fixed 20° mount, add prefix 2 to configuration numbers: i.e. 21, 22, 23, 25 and 26.

GENERAL DESCRIPTION

Non-tapered steel poles are supplied with welded base with cover, four galvanized anchor bolts, masonite mounting template and a pole cap (except tenon mount). Each bolt is provided with two washers and two nuts. Steel pole base has slotted holes. Per National Electrical Code requirements, pole is standard with a 2" x 6" (51 x 152 mm) hand hole, located 18" (457 mm) above bottom of pole base. A #10-32 stainless-steel weld stud with grounding lug is located inside pole, opposite hand hole; a hand hole cover is supplied but shipped separately. In addition, 4" x 27" and 4" x 30" poles include an internal 5/16" steel reinforced sleeve welded inside the bottom 24" of the pole, as well as a reinforcement welded around the hand hole for added strength. For EPA ratings, see "Windloading" sheet.

PATENT

US 5,820,255; 6,640,517; Patent pending

MATERIALS

Square, non-tapered pole of structural steel tubing (ASTM A 500); with a minimum yield strength of 46,000 p.s.i. Welded to a formed carbon steel base plate with a minimum yield strength of 36,000 p.s.i.

FINISH

Exclusive Colorfast DeltaGuard® finish features an E-coat epoxy primer with medium bronze ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. The finish is covered by our seven-year limited warranty.

LABELS

Ruud Lighting square poles meet or exceed National Electrical Code Requirements. In the US, Ruud square poles are classified by Underwriters Laboratories Inc. for electrical ground bonding; in Canada, they are CSA certified for electrical ground bonding and structural strength.

ACCESSORY

Catalog # REC-GFIBZ (120V)
Wet Listed In-use cover



GFIBZ
Accessory

9201 Washington Avenue Racine, Wisconsin 53406-3772 USA

PHONE (262) 886-1900

FAX (262)

© Ruud Lighting Inc. Printed in USA

www.ruudlighting.com

9201 Washington Avenue Racine, Wisconsin 53406-3772 USA

PHONE (262) 886-1900

FAX (262) 884-3309


© Ruud Lighting Inc. Printed in USA

www.ruudlighting.com

05/17/10

RUUD
LIGHTING

Double Face Pylon Sign • KVG Wilson Creek Crossing • City • State

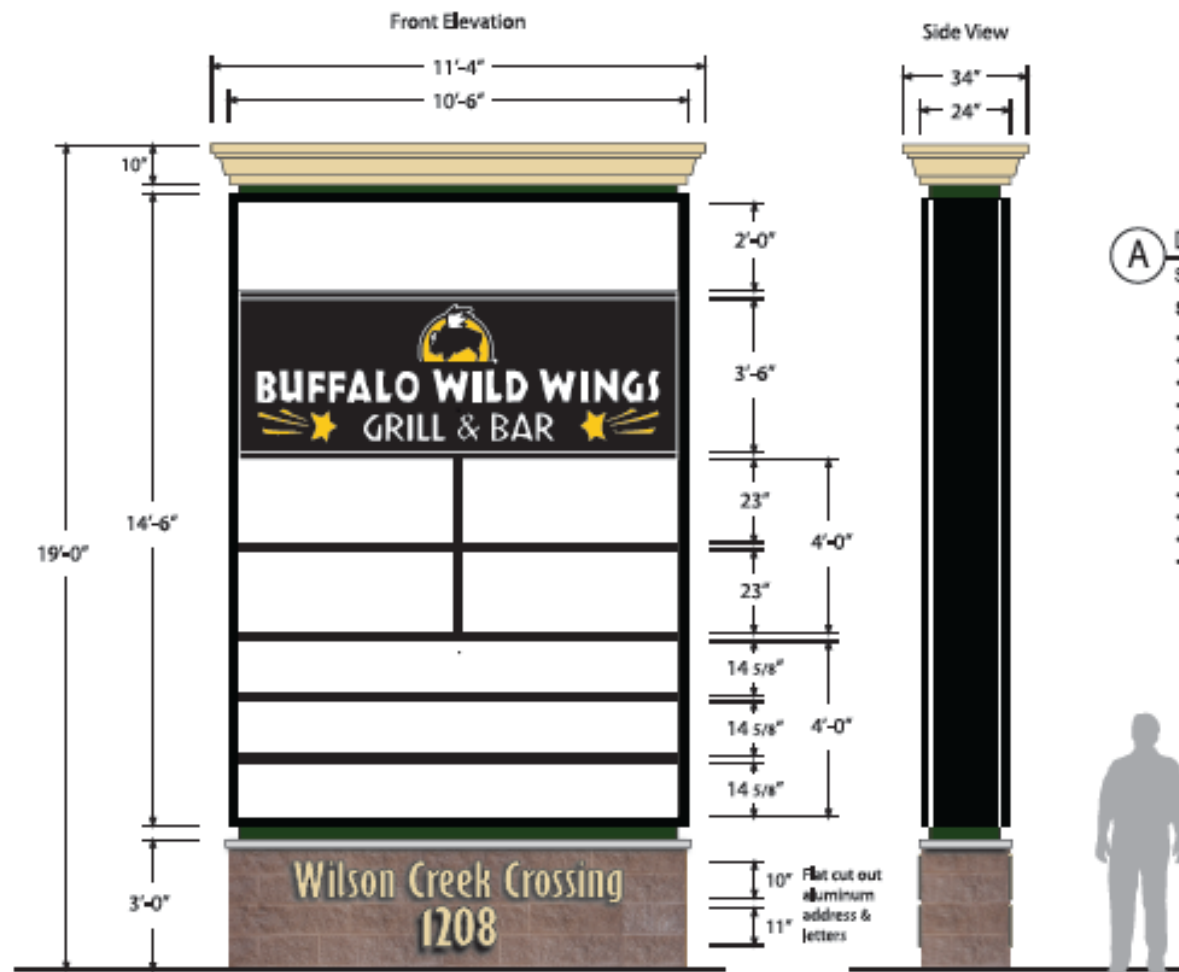

A

Double Face Illuminated Pylon Sign

Scale 1/4" = 1'-0" For Presentation

SPECIFICATIONS FOR FABRICATION AND INSTALLATION:

- Internally illuminated cabinet built to UL specifications
- Quantity: One (1)
- Extruded aluminum construction type: Type III
- Overall width of sign: 10'-6" / Overall height of sign: 18'-0"
- Total square feet: 189
- Cabinet depth: +/- 24"
- Retainer size: +/- 2.25"
- Face type: White Lexan faces w/ first surface vinyl graphics
- Mounting method: Two (2) 8" Dia. steel pipes w/ brick base
- Illuminated with high output fluorescent lamps / ballasts (12" centers)
- Primary electrical requirement:
 - 120 Volt (installed within six feet of sign by others)
 - Timer or photo-cell (installed by others)



AMERICAN
SIGNFACTORY LLC

CHICAGO
123 King Street
E. Grove Village, IL 60007
T 847.725.8000
F 847.725.8005

MILWAUKEE
4811 W. Woodworth Avenue
Milwaukee, WI 53218
T 414.353.3886
F 414.353.6826

Client Name:
KVG Wilson Creek Crossing

Location:
Address
City, State 00000

Start Date: 01/13/11
Last Revision: 02/17/11
Job#: 70567
Drawing#: 70567a_v6
Page: 1 of 2

Client Approval

Landlord Approval

Sales Rep:
MK
Designer:
MM

